


ECS-9000 Series

Quad Core Intel® Xeon®/Core™ i7/i5/i3 (Kayby Lake/Skylake) Fanless Embedded System with Intel® C236 Chipset, 9 GigE LAN with 4 PoE+, 2 Front-access SSD/HDD Tray, Isolated DIO, High Performance, Rugged, -40°C to 75°C Extended Temperature





- LGA 1151 Socket supports workstation-grade Intel® Xeon®/Core™ i7/i5/i3 Processor with C236
- Fanless, -40°C to 75°C Operating Temperature
- 9 Independent GigE LAN with 4 IEEE 802.3at PoE+
- SIM Sockets for WiFi/4G/3G/LTE/GPRS/UMTS
- Front-access : 2 2.5 SSD Tray, 3 SIM, 1 CFAST
- Supports multiple 10GigE Ethernet/10 Gig SFP+ Fiber LAN connections
- Up to 6 Mini PCIe expansions
- 16 Isolated DIO : 8 DI, 8 DO
- 6V to 36V DC-in with 80V Surge Protection
- Configurable Ignition Power Control

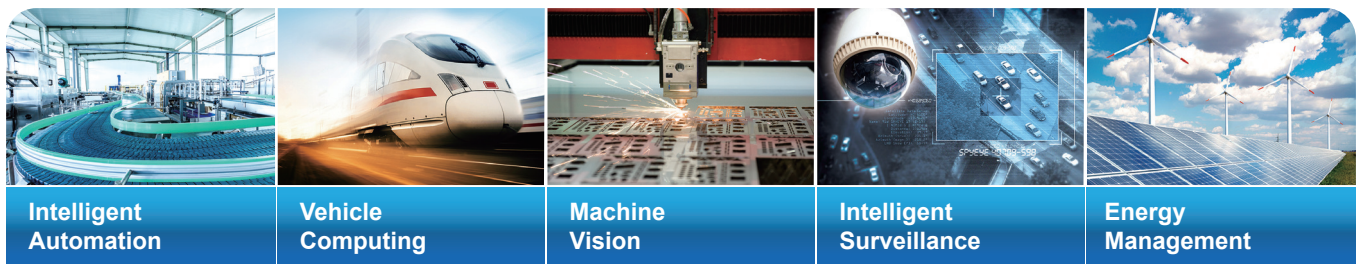

Dimensions & Drawing

Unit: mm (inch)



Specifications

System		PoE	
Processor	Quad Core Intel® Xeon®/Core™ i7/i5/i3 Processor (Kaby Lake-S/Skylake-S)	LAN 3 to LAN 6	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210
Chipset	Intel® C236	Fiber	
BIOS	AMI	LAN 5	1000BASE SFP by Intel® I350
SIO	IT8786E	LAN 6	1000BASE SFP by Intel® I350
Memory	2 DDR4 2400/2133 MHz SO-DIMM, up to 64GB	Power	
I/O Interface		Power Input	6V to 36V, DC-in
Serial	4 COM RS-232/422/485 (ESD 8KV)	Power Interface	• 3-pin Terminal Block : V+, V-, Frame Ground
USB	• 6 USB 3.0 (External) • 1 USB 3.0 (Internal)	Ignition Control	16 Mode (Internal)
Isolated DIO	16 Isolated DIO : 8 DI, 8 DO (Optional)	Remote Switch	3-pin Terminal Block : On, Off, IGN
LED	Power, HDD, PoE	Surge Protection	Up to 80V/1ms Transient Power
SIM Card	3 SIM Card Socket (External)	Others	
Expansion		TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Mini PCIe	3 Mini PCIe Socket : • 2 Full-size for PCIe/USB/External SIM/mSATA • 1 Half-size for PCIe/USB 3.0/External SIM	Watchdog Timer	Reset : 1 to 255 sec./min. per step
SUMIT A, B	2 SUMIT Slot (Optional)	Smart Management	Wake on LAN, PXE supported
Graphics		HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats
Processor	Intel® HD Graphics P630/630/P530/530	Software Support	
Interface	• DVI-I : Up to 1920 x 1200 @ 60Hz • DVI-D : Up to 1920 x 1200 @ 60Hz • DisplayPort : Up to 4096 x 2304 @ 60Hz	OS	Windows 10, Windows 8.1, Windows 7, Linux
Storage		Mechanical	
SATA	2 SATA III (6Gbps)	Dimension	260mm x 175mm x 79mm (10.2" x 6.9" x 3.1")
mSATA	2 SATA III (Mini PCIe Type, 6Gbps)	Weight	3.8 kg (8.38 lb)
SATA DOM	1 SATA II (3Gbps)SSSS	Mounting	• Wallmount by mounting bracket • DIN Rail Mount
Storage Device	• 1 CFast Socket, Push-in/ Push-out Ejector ECS-9000-9R, PoER, 6FR, 4R, 2R : 2 Front-access 2.5" SSD/HDD Tray ECS-9000-9GD, PoE, 6F, 4G, 2G : 2 2.5" SSD/HDD Bracket (Internal)	Environment	
Audio		Operating Temp.	35W TDP CPU : • Core™ i7, i5, i3 : -40°C to 75°C (-40°F to 167°F) • Xeon® E3-1268L v5 : -40°C to 70°C (-40°F to 158°F) 65W TDP CPU : Core™ i7, i5, i3 : -40°C to 55°C (-40°F to 131°F) 80W TDP CPU : Xeon® E3-1275 v6, E3-1275 v5, E3-1225 v5 : -40°C to 45°C (-40°F to 113°F) -40°C to 85°C (-40°F to 185°F)
Audio Codec	Realtek ALC888S-VD, 7.1 Channel HD Audio	Storage Temp.	5% to 95% Humidity, non-condensing
Audio Interface	1 Mic-in, 1 Line-out	Humidity	95% @ 75°C
Ethernet		Relative Humidity	• IEC 60068-2-27
LAN 1	Intel® I219LM GigE LAN supports iAMT 11.0	Shock	• SSD : 50G @ wallmount, Half-sine, 11ms
LAN 2	Intel® I210 GigE LAN	Vibration	• IEC 60068-2-64
LAN 7 to LAN 9	Intel® I210 GigE LAN	EMC	• SSD : 5Grms, 5Hz to 500Hz, 3 Axis E13, CE, FCC, EN50155, EN50121-3-2

Order Information

ECS-9000-9R	• ECS-9000, 9 GigE LAN w/4 PoE+, 2 SSD Tray, 4 COM, 3 SIM, 6 USB 3.0, 16 Isolated DIO
ECS-9000-9GD	• ECS-9000, 9 GigE LAN w/4 PoE+, 4 COM, 3 SIM, 6 USB 3.0, 16 Isolated DIO
ECS-9000-PoER	• ECS-9000, 6 GigE LAN w/4 PoE+, 2 SSD Tray, 4 COM, 3 SIM, 6 USB 3.0, 16 Isolated DIO
ECS-9000-PoE	• ECS-9000, 6 GigE LAN w/4 PoE+, 4 COM, 3 SIM, 6 USB 3.0, 16 Isolated DIO
ECS-9000-6FR	• ECS-9000, 6 GigE LAN w/2 SFP, 2 SSD Tray, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO
ECS-9000-6F	• ECS-9000, 6 GigE LAN w/2 SFP, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO
ECS-9000-4R	• ECS-9000, 4 GigE LAN, 2 SSD Tray, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO
ECS-9000-4G	• ECS-9000, 4 GigE LAN, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO
ECS-9000-2R	• ECS-9000, 2 GigE LAN, 2 SSD Tray, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO
ECS-9000-2G	• ECS-9000, 2 GigE LAN, 4 COM, 3 SIM, 6 USB 3.0, 16 GPIO

DDR4 32G	• Certified DDR4 32GB 2666MHz RAM
DDR4 16G	• Certified DDR4 16GB 2400/2133 MHz RAM
DDR4 8G	• Certified DDR4 8GB 2400/2133 MHz RAM
DDR4 4G	• Certified DDR4 4GB 2400/2133 MHz RAM
PWA-120W	• 120W, 24V, 90V AC to 264V AC Power Adapter with 3-pin Terminal Block
PWA-120WM4P	• 120W, 24V, 90V AC to 264V AC Power Adapter with 4-pin Mini-DIN Connector
PWA-160W-WT	• 160W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
PWA-180W	• 180W, 24V, 90V AC to 132V AC/ 180V AC to 264V AC Power Adapter with 3-pin Terminal Block, 0°C to +40°C
PWA-280W-WT	• 280W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
TMK2-20P-100	• Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm
TMK2-20P-500	• Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm
TMB-TMBK-20P	• Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting
VESA Mount	• VESA Mounting Kit
DIN-RAIL Kit	• DIN Rail and VESA Mounting Kit
Rack Mount	• 2U Rackmount Kit
4G Module	• Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth	• WiFi & Bluetooth Module with Antenna

CPU List

Series	CPU	Cache (MB)	Turbo Freq. (GHz)	TDP (W)	ECC Memory
Intel® Xeon®	E3-1275 v6	8	4.2	80	Y
	E3-1275 v5		4	80	
	E3-1225 v5		3.7	80	
	E3-1268L v5		3.4	35	
Intel® Core™	i7-7700	8	4.2	65	NA
	i7-7700T		3.8	35	
	i7-6700		4	65	
	i7-6700TE		3.4	35	
	i5-7500	6	3.8	65	NA
	i5-7500T		3.3	35	
	i5-6500		3.6	65	
	i5-6500TE		3.3	35	
	i3-7101E	3	3.9	65	Y
	i3-7101TE		3.4	35	
	i3-6100	4	3.7	65	
	i3-6100TE		2.7	35	

ECS-9000-20210624

Vecow

www.vecow.com
info@vecow.com

* All product information may subject to change without prior notice.
* The rights of all brand names, product names and trademarks belong to their respective owners.
Copyright © 2021 Vecow Co., Ltd. All rights reserved.