

ASB200-883-6COM

Fanless Interactive Clients with 6 Serial Ports & 8 GPIOs

SBC System



Features

- Supports 6 Serial Ports & 8 GPIOs
- Onboard Intel® Atom™ Processor N270, 1.6GHz
- Available in black color
- 2x 10/100/1000 Base-T LAN
- 4x USB 2.0 ports
- VGA and DVI-D support dual display
- Supports 1 x 2.5" SATA HDD & accessible CF socket


Specifications

System Mainboard	IB883
CPU Type	Intel® Atom™ Processor N270
System Speed	1.6GHz
Memory	1x DDR2 533 SO-DIMM, Max. 2GB
Construction	Aluminum & Steel
Chassis Color	Black
Front Panel External I/O	6x COM (4 COM via ID394), Power LED, HDD LED, Power on/off button, Reset button, audio, 2x USB ports
Rear Panel External I/O	1x VGA, 1x DVI 2x USB ports, 2x RJ45 connectors 1x KB/MS connector, DC-in jack
Storage	1x 2.5" HDD drive bay, 1x Type II CF socket
Power Supply	60W power adaptor
Mounting	Wall mount
Dimensions	240mm(W) x 162mm(D) x 45.8mm(H)
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	CFD: 5 grms / 5~500Hz / random operation HDD: 0.25 grms / 5~500Hz / random operation

Ordering Information

ASB200-883-6COM	Aluminum Chassis with IB883 3.5" SBC, Intel® Atom™ N270 (1.6GHz) CPU, 2.5" HDD holder, 6x COM, DVI+CRT, 60W power adaptor
-----------------	---

Dimensions

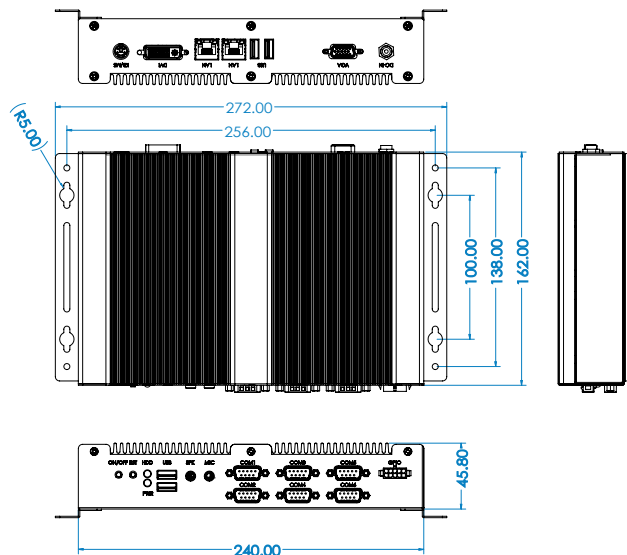

01 Motherboards

02 Disk-Size SBCs

03 CPU Modules

04 PC 104 Plus

05 CPU Cards

06 RISC SBCs

07 Embedded Systems