

# EKI-9510G-2GPH

# EKI-9510G-2GPL

**EN 50155 10-port Unmanaged PoE M12 Full Giga Ethernet Switch 72/96/110 V<sub>DC</sub>**  
**EN 50155 10-port Unmanaged PoE M12 Full Giga Ethernet Switch 24/48 V<sub>DC</sub>**



CE FCC

## Features

- Complies with EN50155
- 8 x M12 X-Coded 10/100/1000Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input  
EKI-9510G-2GPH: 72/96/110 V<sub>DC</sub>  
EKI-9510G-2GPL: 24/48 V<sub>DC</sub>
- Operating Voltage  
EKI-9510G-2GPH: 50.4~137.5 V<sub>DC</sub>  
EKI-9510G-2GPL: 16.8~60 V<sub>DC</sub>
- 8-port PoE support IEEE802.3 at/af
- M12 connector with IP40 protection

## Introduction

EKI-9500 series switch is designed for railway application, with rugged and high EMC performance. EKI-9500 series is the suitable networking solution for rolling stock and wayside applications. EKI-9500 series provide M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, to guarantee reliable operation against environmental disturbances, such as vibration and shock on train. EKI-9510G-2GPH & EKI-9510G-2GPL is a Unmanaged PoE Ethernet switch, it provides 8 x Gigabit Ethernet M12 X-code interface with IEEE802.3af/at PoE(Power Over Ethernet) function. PoE ports can total provide up to 100Watts power budget for P.D. devices (such as camera, IP-phone and wireless access point). It also provides 2 x Gigabit Ethernet M12 X-code interface with Bypass function, to increase the reliability of the network. EKI-9510G-2GPH/ PL features a "flat" design, can be easy deployed with its slender size and let network deployment more simple in crowded carriage/ cabinet.

## Specifications

### Interface

- I/O Port** 8 x 10/100/1000Mbps M12 X-Coded +  
2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Connector** M12 A-Coded

### Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 40
- Installation** Wall Mount
- Dimensions (W x D x H)** 216 x 132 x 59.3 mm
- Weight** 1.5kg

### LED Display

- System LEDs** PWR1, PWR2, SYS, Alarm
- Port LED** Data, PoE

### Environment

- Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Ambient Relative Humidity** 10~ 95% (non-condensing)

### Power

- Power Consumption** 10 Watts
- PoE Power Budget** EKI-9510G-2GPH: 120 Watts  
EKI-9510G-2GPL: 60 Watts
- Power Input** EKI-9510G-2GPH: 72/96/110 V<sub>DC</sub>  
EKI-9510G-2GPL: 24/48 V<sub>DC</sub>
- Operating Voltage** EKI-9510G-2GPH: 50.4~137.5 V<sub>DC</sub>  
EKI-9510G-2GPL: 16.8~60 V<sub>DC</sub>  
Dual inputs Supports Overload Current Protection  
Supports Reverse Polarity Protection

### Certification

- EMI** FCC Part 15 Subpart B Class A  
CE EN55032 (CISPR)  
EN55024 Class A
- EMS** EN61000-4-2 (ESD); EN61000-4-3 (RS);  
EN61000-4-4 (EFT); EN61000-4-5 (Surge);  
EN61000-4-6 (CS)
- Shock** IEC 61373
- Freefall** IEC 60068-2-32
- Vibration** IEC 61373
- Certificate** EN 50155; EN50121-3-2


### L2 Features

- L2 MAC Address** 8K
- Jumbo Frame** 9KB

# EKI-9510G-2GPH EKI-9510G-2GPL

## Dimensions

Unit: mm [inch]

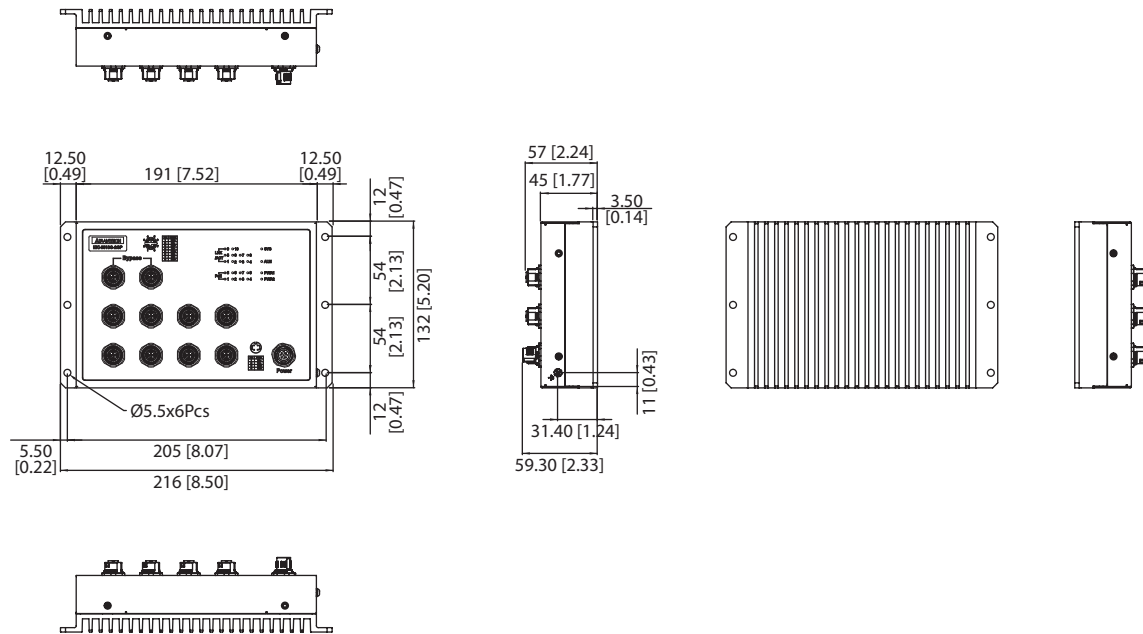

## Ordering Information

- **EKI-9510G-2GPH-AE** 8 x M12 X-Coded PoE + 2 x M12 X-Coded Unmanaged Ethernet Switch, 72/96/110V<sub>DC</sub> dual power input
- **EKI-9510G-2GPL-AE** 8 x M12 X-Coded PoE + 2 x M12 X-Coded Unmanaged Ethernet Switch, 24/48V<sub>DC</sub> dual power input

## Accessories

PN		Description
OPT1-M12-CRP-8MX		Phoenix Contact M12 X-code 8 pin Male crimp type connector
OPT1-M12-CRP-4FA		Phoenix Contact M12 A-code 4 pin Female crimp type connector
OPT1-M12C-8MX-150R		M12 X-code 8 pin Male to RJ45, cable length: 1.5m
OPT1-M12C-4FA-100		M12 A-code 4 pin Female to 1m cable
1990023703S000		M12 waterproof CAP (1pc.)