

PPC-125T

12" Panel PC with Intel® Core™2 Duo Processor



Features

- 12.1" TFT XGA (1024 x 768) LCD Panel
- Intel® Core™2 Duo processor up to 2.16 GHz
- System memory up to 4 GB (DDR2 200-pin SODIMM socket x 2)
- 1 x PCI slot or 1 x PCIe slot (both optional)
- One Mini PCIe slot
- Built-in CF card interface (IDE interface for OS booting)
- Two Gigabit Ethernet ports, support LAN teaming
- One RS-232/422/485; (supporting Auto-flow control, selecting by BIOS)

susiAccess



Introduction


The PPC-125T is an Intel Core 2 Duo based Panel PC with 12.1" color TFT LCD. It features multimedia devices, various connectors, and can be installed in virtually any application. In addition, its user-friendly interface makes it a great host for information appliances. Four serial COM supports auto-flow control PPC-125T advanced networking capabilities, and provides a great solution for versatile applications.

Specifications

Processor System	CPU	Supports mSocket 478 based Core 2 Duo up to 2.16 GHz
	CPU FSB	533/667 MHz
	Chipset	945GME + ICH7M
	Disk Drive Housing	Room for 1 x 2.5" SATA HDD
	Dimensions (W x H x D)	376 x 285.55 x 100.95 mm (14.80" x 11.24" x 3.97")
	Front Panel Protection	IP65 compliant
	Weight	5.6 kg (12.33 lb)
	HDD	SATA HDD interface (2.5" HDD bay)
	DVD+/-RW Drive	Optional external module with SATA DVD-RW Drive
	Memory	Socket x 2, supports up to 4 GB DDR2 SDRAM 200pin SODIMM
OS Support	Network (LAN)	2 x Gigabit Ethernet ports, support both wake on LAN and boot from LAN functions.
	I/O Ports	- 4 x COM ports: 3 x RS-232, 1 x RS-232/422/485 - 6 x USB 2.0 ports - 1 x PS/2 mouse and keyboard interface - MIC in / Line in / Line out port, 1 W speakers - 2 x Gigabit Ethernet ports - 1 x D-SUB VGA port
	Bus Expansion	PCI riser card & PCIe riser card are available as options, 1 x Mini PCI socket, 1 x Mini PCIe socket
Environmental Specifications	OS Support	Win XPE, Win XP Pro, WES7 with 32 bit, WES7 with 64 bit (only for T7400 CPU)
	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Relative Humidity	10 ~ 95% @ 40°C non-condensing
	Shock	Operating 10 G peak acceleration (11 ms duration), follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5~500Hz, 1Grms, follow IEC 60068-2-64
	EMC	BSMI, CE, FCC Class B, CCC
	Safety	CB, CE, UL
Power Supply	AC Model	Output Rating
		150 W (max.)
		Input Voltage
LCD Display		100 ~ 240 V _{ac} , 50 ~ 60 Hz, 2 ~ 4 A
		Output Voltage
		+3.3 V @ 4.5 A, +5 V @ 8.5 A, +12 V @ 7.0 A, +5 V _{sb} @ 1.5 A, -12 V @ 0.3 A
		Display Type
		Color TFT LCD
		Size (Diagonal)
		12.1"
		Max. Resolution
		1024 x 768
		Max. Colors or Grayscales
		262 K
		Pixel Pitch (mm)
		0.240 x 0.240
Touchscreen (optional)		Luminance (cd/m ²)
		450
		Contrast Ratio
		700 : 1
		Viewing Angle
		80°(left), 80°(right), 80°(up), 80°(down)
		Operating Temperature
LCD MTBF		-30 ~ +70°C
		50,000 hrs
Type		5-wire Analog Resistive (USB interface)

Dimensions

Unit: mm

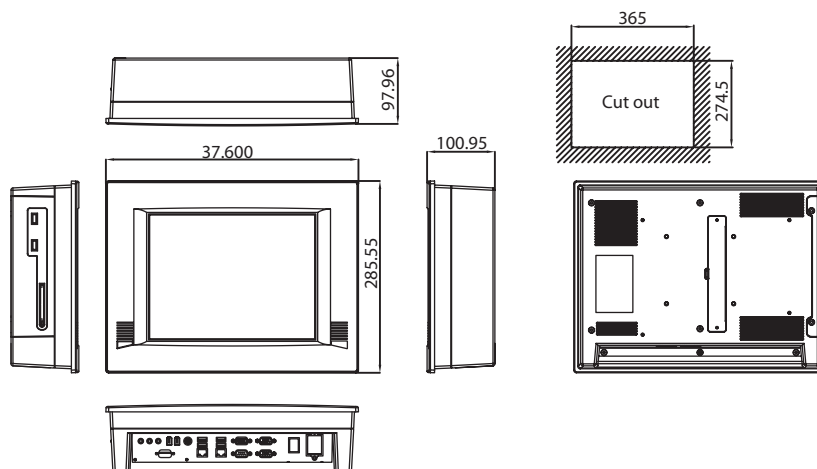

Ordering Information

Part No.	Description
PPC-125T-BAREE	12.1" Core 2 Duo Panel PC without T/S
PPC-125T-BARE-TE	12.1" Core 2 Duo Panel PC with Resi. T/S
PPC-125-STANDE	Stand kit for PPC-125 series
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
989K012500E	PCI-e riser card with rear add-on box with 1 x Slim SATA ODD bay
989K012502E	DVD-RW Drive Module for PPC-125 with 1 x PCI-e slot
989K012503E	PCI riser card with rear add-on box with 1 x Slim SATA ODD bay
1702002605	POWER CABLE 90D 220V EUROPEAN 250V/6A 1.8M
1702002600	Power Cable UL/CSA (USA) 180D 125V10A 1.83M
2070006629	XPE FP2007 PPC-125T V3.01 (ENG/JPN/Simplified Chinese/Traditional Chinese), 4 languages with SUSI Access
2070006569	Image XPE FP2007 PPC-125T V3.01 ENG
2070011330	IMG XPE WES09 PPC-125T V4.0 24 multi-languages with SUSI Access

Feature Details

Protection

To meet the requirements of a public environment, the front panel PPC-125T complies with the IP65 protection standard. Furthermore, the watchdog timer and power management features make the system secure and stable. The onboard hardware monitoring feature provides an automatic protection function, which prevents the CPU from becoming overheated.

Expansion

To extend functionality, the PPC-125T is designed with either one expansion slot for PCI card or PCIe card and six USB 2.0 (Universal Serial Bus) ports. With these expansion capabilities, the PPC-125T not only functions as an HMI, but also as a computing center on which to build your applications.

I/O Appearance

