
UTC-115

15.6" Ubiquitous Touch Computer UTC-115H with 8th Gen Intel® Core™ i5/i3 Processor



Features

- Slimmer and Lighter design
- Low power and fanless system design
- Built-in Intel® Core™ i5-8365UE
- 15.6" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Clean back cover design with 3 Way IO cable routing
- Supports both landscape and portrait screen orientations
- VESA 100 mm standard mounting holes for varied mounting demands
- Support DeviceOn/iService software for remote device management



DeviceOn/iService

Introduction

UTC-115 features an all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas.

Thanks for the slim and light looking with 3 way cable routing design, makes UTC-115 good fit to diverse scenarios and areas.

The systems deliver updated information with well-designed interactive interfaces, with fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Moreover, Advantech DeviceOn/iService Software is a next-generation unified device management unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

Specifications

	CPU	Intel [®] Core™ i5-8365UE / I3-8145UE (UTC-115H) (Intel Vp	ro support)
	Base Frequency	1.10 GHz (i5) / 1.60Ghz (i3) (Quad-Core)	
	Memory	1 x 260 pin SO-DIMM DDR4 2400 MT/s up to 16GB	
	Storage	1 x 2.5 internal SATA storage, M.2 2242/2280 SSD	
	Network	2 x Gigabit Ethernet ports (Supports Wake on LAN)	
Process system	I/O Ports	2 x RS-232 COM (COM2 RS-232/422/485) 4 x USB3.0 2 x Gigabit Ethernet ports 1 x HDM1.4 1 x Audio Phone Jack	
	Stereo Speaker	2 x 2W	
	Bus expansion	1 x M.2 key2230, 1 x M.2 key2242	
	Mounting	VESA 100 x 100 mm (Screw Size, M4, 6mm)	
	Dimension (WxHxD)	398.8 x 248.2 x 29.5	
	Weight	2.4kg	
OS Support		Win 10 IoT Enterprise 64bit Linux	
	Operating temperature	0 ~ 35 °C (32 ~ 95 °F)*	
	Relative Humidity	10 ~ 95% @ 40 °C non-condensing	
	Vibration	0.5G	
Environment Specification	Shock	Shock 10G peak acceleration(11 msec. duration)	
	Certification	CE, FCC, CB, UL, CCC, BSMI	
	Front Panel Protection	IP 65 Compliant	
	DC Input Rating	12V/5A~24V/2.5A, 60W ITE Adapter	
Power Supply	PoE	n/a	
	Power consumption	45W	
	Size/Type	15.6" HD	15.6" FHD (Option)
	Max.Resolution	1366 x 768	1920 x 1080
LOD Display	Max. Color	262K	262K
LCD Display	Pixel Pitch (um)	252(H) x 252(V)	179(H) x 179(V)
	Brightness (cd/m ²)	250	400
	View Angle	90°/50°	170°/170°
	Туре	Projected Capacitive.	
Touch Screen Option	Light Transmission	> 85%	
	Controller	USB Interface	
TPM		TPM 2.0	


AD\ANTECH Interactive Self-service Terminals

All product specifications are subject to change without notice, * identify as optional function

Specifications (Cont.)

	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	\checkmark
	Remote desktop	√(VNC)
	Device-Specific Controls (Audio)	\checkmark^{\star}
	Connection Status	\checkmark
	Hardware Status	\checkmark^{\star}
DeviceOn/iService	Hard Disk Status	\checkmark^{\star}
Remote Device Management	Batch Operation Support	\checkmark
	OTA Storage Management	FTP
	OTA Software Updates	\checkmark
	Software Watchlist	\checkmark
	Software Start/Stop	\checkmark^{\star}
	Kiosk Mode	
Dependent on device model	Peripherals Watchlist	$\sqrt{}$

Note: DeviceOn//Service software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility

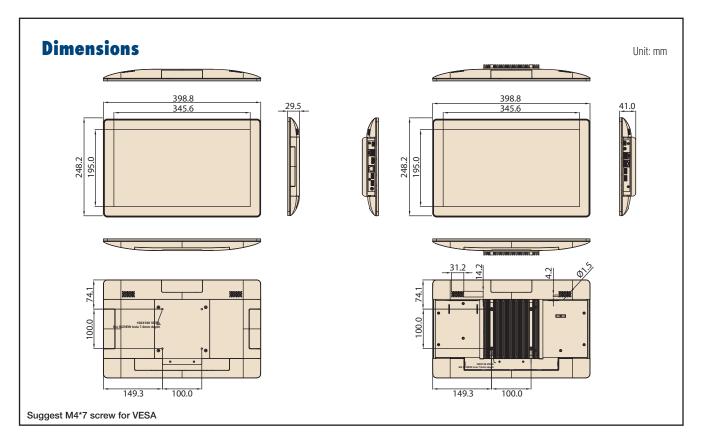

Fully- Integrated I/O



Ordering Information

For Worldwide Model

Part No.	Descriptions
UTC-115HP-WWW1F	15.6" Pcap, FHD 1920x1080, i5-8365UE CPU, 4G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color
For US only Model	

Part No.	Descriptions
UTC-115HP-WUS1F	15.6", Pcap, FHD 1920x1080, i5-8365UE CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Power cord, Silver Color
UTC-115HP-NUS1F	15.6", Pcap, FHD 1920x1080, i5-8365UE CPU, 8G RAM, 128G SSD, Wifi/BT, Power cord, Silver Color

For China Only Model

Part No.	Descriptions
UTC-115HP-NCN1E	15.6" Pcap, HD 1366x768, i3-8145UE CPU, 4G RAM, 128G SSD, No OS, Wifi/BT, Silver Color

For EU only Model

Part No.	Descriptions
UTC-115HP-WEU1F	15.6" Pcap, FHD 1920x1080, i5-8365UE CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color, Power Cord
UTC-115HP-WEF1F	15.6", Pcap, FHD 1920x1080, i3-8145UE CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color, Power Cord

Extra ordering information

Part No.	Descriptions
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596-11	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1700025928-02	COM Port Converter cable RJ48-10P10C to D-SUB 9P 35cm
UTC-T01-STANDE	Tri Shape Floor Stand 120cm
UTC-100P-STAND0E	L Stand for UTC-115
UTC-300P-D20E	Desk Stand, Silver, for UTC-115/120
UTC-UPOS-STANDOE	Double Hinge Stand
UTC-AVALO-STANDOE	Avalo Stand
ARES-2423X-S151001	Table Stand for UTC-115 (Black)
ARES-2425X-S271001	Tilt Table Stand for UTC-100 Serires (Black) (Support Portrait & Landscape)
ARES-12250-L101000	Vesa Wall-mount for UTC-100 Series (Black)

Peripheral Mountable on All 4 Sides



Peripherals for UTC-100(AIO system) series

Part No.	Description
UTC-100P-B11E	2D Barcode Scanner for UTC-115/120
UTC-100P-C10E	5M Camera for UTC-115/120
UTC-100P-R10E	RFID Scanner for UTC-115/120
UTC-100P-M10E	MSR Reader for UTC-115/120
UTC-100P-S10E	Smart Card Reader for UTC-115/120
UTC-100P-L10E	LED Light Bar for UTC-115/120
UTC-100P-F10E	Finger Print Reader for UTC-115/120
UTC-100P-T10E	Thermal Camera for UTC-115/120

DeviceOn/iService

Unified Remote Device Management Software

		Device	:UN/156	rvice		
1	C HA HOD mean (MA) form (M)		DeviceOn/IService		Search Thomas Search Thomas Se	
	A second		Paratopi Trapa Baya Lupp Lupp		0 0 2 1 10 0 0 0	

Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

Introduction

33

ΆΡΙ

500

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

Total Management

Devices & Hardware

Windows, Linux, Android

Hardware, storage, battery

Software & Peripherals

Open for Expansion

Peripheral integration

Open APIs for integration

Software monitoring & access

Screens, USB devices, printers

Remote Access

igo



- Connection/hardware status
- Software/peripheral status
- Failure notifications

Remote Controls

- Power controls
- Audio, backlight controls
- Software controls

Troubleshooting

- Screenshots
- Remote desktop support

Operational Efficiency

OTA updates

- System/software updates
- File repository management
- App store

Batch Controls

<u>~</u>

ΟΤΑ

1-to-many batch reboot, etc.Time-saving tasks

Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

System Architecture

