
# **UTC**-115

## **15.6" Ubiquitous Touch Computer** UTC-115I with 11th Gen Intel® Core™ i7/i5/i3 Processor



# Features

- Slimmer and Lighter design
- Low power and fanless system design
- Built-in Intel® Core™ i5-1145G7E
- 15.6" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Clean back cover design with 3 Way IO cable routing
- Supports both landscape and portrait screen orientations
- VESA 100 mm standard mounting holes for varied mounting demands
- Support DeviceOn/iService software for remote device management



# Introduction

### DeviceOn/iService

UTC-115 features an all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas.

Thanks for the slim and light looking with 3 way cable routing design, makes UTC-115 good fit to diverse scenarios and areas.

The systems deliver updated information with well-designed interactive interfaces, with fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Moreover, Advantech DeviceOn/iService Software is a next-generation unified device management unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

# **Specifications**

Process system     CPU     Ind Cone 7-118567E (Defaurit) Intel Cone 3-115562E			
Base Frequency     Elso GHz (Quad-Corres) 5: 22 0 GHz (Quad-Corres) 5: 20 0 GHZ (QUAD-		CPU	Intel Core i5-1145G7E (Default)
Memory     1 x 25 0pin SO-DIMN DDPA 3200 MF2 uot 32GB       Storage     1 x 25 internal SATA storage, M2 2240/2280 SSD       Network     2 x Gigabit Ethernet ports (Supports Wake on LAN)       2 x SS - 225 CMC (DVDR 15-S22/4/2/485)     3 x USB 32 Gen 1 Type-C       3 x USB 32 Gen 1 Type-C     2 x Gigabit Ethernet ports       1 x DC- In USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Ethernet ports       1 x DC- IN USB Type-C     2 x Gigabit Et		Base Frequency	i5: 1.50 GHz (Quad-Cores)
Network     2 × Gigabit Element ports (Supports Wake on LAN)       Process system     2 × Gigabit Element ports (Support Wake on LAN)       VO Ports     2 × Gigabit Element ports (Support Wake on LAN)       VO Ports     2 × Gigabit Element ports (Support Wake on LAN)       VO Ports     1 × USB 3.2 Gen 1 Type A.       1 × DC-in USB Type C.     2 × Gigabit Element ports (Support Wate on LAN)       Stereo Speaker     2 × 2W       Stereo Speaker     2 × 2W       Bus expansion     1 × M 2 key2230 1 × M 2 key2280       Mounting     VO Not No 100 rms (Screw Size, M4, 6mm)       Dimension (Watco)     398.8 × 248 2 × 29.5       Weight     2 × 40       Unit Ing     0 × 0 (0 × 2 · 104 *F)       Relative Humidity     10 - 95% 6 × 0 <sup>2</sup> C non-condensing       Vibration     0.56       Shock     Shock 106 pask acceleration(11 msec, duration)       Certification     0.6 (FCC, GB, UL, CCC, BSMI)       Front Pasel Protection     P66 Compliant       Power Supply     Di Shock 106 pask acceleration(11 msec, duration)       Certification     0.6 (FCC, GB, UL, CCC, BSMI)       Front Pasel Protection     P66 Compliant       Po		Memory	
Process system     2 x 95-322 COM (COM 2 FS-232/422/485) x USB 32 Gen 1 Type-C 1 x USB 32 Gen 1 Type-C 2 x Gigabit Ethernet ports x ty USB 32 Gen 1 Type-C 2 x Gigabit Ethernet ports x ty UDB 14 1 x Audio Phone Jack       Steros Speaker     2 x 2W Bus expansion     1 x M2 key2280       Munting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WxHxD)     388 x 248 2 x 295       Winting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WxHxD)     2 4kg       Bis expansion     1 x M2 key2230.1 x M2 key2280       Munting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WxHxD)     388 x 248 2 x 295       Min 10 lo T Enterprise Gebit Linux     1       Belative Humidity     0 - 40 °C (32 - 104 °F)       Relative Humidity     0 - 56 % 24 °C con-condensing       Vibration     0 56       Cortification     E FC (C, B, UL, CC, B, SM       Poer     Stock 106 peak acceleration(11 msec. duration)       Certification     E FC (C, B, UL, CC, B, SM       Poer     Qui A 50 (90W)       Certification     E FC (C, B, UL, CC, B, SM       Poer     Qui A 50 (90W)       Accolor     SSW       Poer     SSW 700		Storage	1 x 2.5 internal SATA storage, M.2 2242/2280 SSD
Process system     V0 Ports     X USB 3.2 Gen 1 Type-C 1 x DC-in USB 3.2 Gen 1 Type-C 2 x Gipalit Ethernet ports 1 x HDM 1 4       Stero Speaker     2 x 2W       Stero Speaker     2 x 2W       Bus expansion     1 x M 2 key2280       Mounting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WxHxD)     398.8 x 248.2 x 29.5       Vielpt     2 4kg       Weipt     2 4kg       Win 10 In Etherprise 64bit Linux     Linux       Invation     0.5 (32-104 °F)       Relative Hurridity     10 - 95% e0 40 °C non-condensing       Viroation     0.56 (32-104 °F)       Relative Hurridity     0.56 (30-00 Kok       Shock     Shock 106 peak acceleration(11 msec. duration)       Certification     Frot Panel Protection       Poeer onsumption     256 (7F) HD       Power Supply     PoE     n/a       Power Consumption     35W       Max Color     256 (FHD       Max Color     250 (25 K       Power Consumption     35W       Max Color     250 (25 K       Max Color     250 (25 K       Pixel Pitht (um)		Network	2 x Gigabit Ethernet ports (Supports Wake on LAN)
Bus expansion     1 x M 2 key2230,1 x M 2 key2280       Mounting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WxHzD)     398 8 x 248 2 x 29.5       Weight     2.4kq       OS Support     Win 100 Tenterprise 64bit Link       Pertaing temperature     0 - 40 °C (32 - 104 °F)       Relative Humidity     10 - 95% @ 40 °C non-condensing       Vibration     0.5G       Sock     Shock 100 peak acceleration(11 msec. duration)       Certification     CE, FCC, GB, UL, CCC, BSMI       Front Panel Protection     IP 65 compliant       Power consumption     35W       Power consumption     35W       Max. Color     35W       Max. Color     1920 x 1080       Max. Resolution     1920 x 1080       Max. Color     262K       Poiet Chruft (mm)     179/170°       Brightens (x/m²)     300       View Angle     170/170°       View Angle     170/170°       View Angle     182/1642       View Angle     58% %       Controller     USB Interface	Process system	I/O Ports	3 x USB 3.2 Gen1 Type-A 1 x USB 3.2 Gen 1 Type-C 1 x DC-in USB Type-C 2 x Gigabit Ethernet ports 1 x HDM1 1.4
Bus expansion     1 x M.2 key2280       Mounting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WHxD)     398.8 x 248.2 x 29.5       Weight     2.4kg       OS Support     Of an in 10 InT Enterprise 64bit Linux       Prevention     Operating temperature     0 – 40 °C (32 – 104 °F)       Relative Humidity     10 – 95% @ 40 °C non-condensing       Vibration     0.56       Shock     Shock (10 6 pask acceleration(11 msec. duration)       Certification     CE FCC, CB, UL, CCC, BSMI       Front Panel Protection     P 65 Compliant       Power Supply     Of 0     200/45A (90W)       Power consumption     350       Max Resolution     1920 x 1080       Max Resolution     1920 x 1080       Max Color     262K       Protection     1920 x 1080       Max Color     262K       Protection     1920 x 1080       Max Color     300       View Angle     300       View Angle     300       View Angle     300       View Angle     109/170°       Store Sign		Stereo Speaker	2 x 2W
Mounting     VESA 100 x 100 mm (Screw Size, M4, 6mm)       Dimension (WXHzD)     398 x 242 z 295       Weight     2.4kg       OS Support     Win 10 IoT Enterprise 64bit Linux       Os Support     Operating temperature     0 - 40 °C (32 - 104 °F)       Relative Humidity     10 - 95% @ 40 °C non-condensing       Vibration     0.5G       Shock     Shock 106 peak acceleration(11 msec. duration)       Certification     CE, FCC, CB, UL, CCC, BSMI       Front Panel Protection     P65 Compliant       Power Supply     P0E     n/a       Power consumption     35W       LCD Display     Max Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightes (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Kes %%       Light Transmission     85%       Concoller     USB Interface			1 x M.2 kev2230, 1 x M.2 kev2280
Dimension (WxHxD)     398.8 x 248.2 x 29.5       Weight     2.4kg       OS Support     Win 10 for Enterprise 64bit Linux       Bealize Humidity     0 ~ 40 °C (32 ~ 104 °F)       Relative Humidity     0 ~ 95% @ 40 °C non-condensing       Vitoration     0.5 Ge       Vitoration     0.5 Ge       Certification     C.F. FCC, CB, UL, CCC, BSMI       Ford Pael Protection     1P6 5C compliant       Power Supply     DC Input Rating       D C Input Rating     20V/45A (90W)       Power supply     DC Input Rating       Power supply     19.5 °F FHD       Max Resolution     1920 x 1080       Max Resolution     1920 x 1080       Max Color     262K       Pixel Prote (um)     19.9 (H)			
OS Support     Win 10 IoT Enterprise 64bit Linux       Operating temperature     0 - 40 °C (32 - 104 °F)       Relative Humidity     10 - 95% @ 40 °C non-condensing       Vibration     0.56       Shock     Shock 10G peak acceleration(11 msec. duration)       Certification     CE, FCC, CB, UL, CCC, BSMI       Front Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating     20V/4.5A (90W)       Power consumption     35W       Size/Type     15.6 °F HD       Max. Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Type     Projected Capacilive.       Lob Interface     25%			
OS Support     Linux       Prevention     0-40 °C (32 - 104 °F)       Relative Humidity     10 - 95% @ 40 °C nondensing       Vibration     0.56       Shock     Shock 106 peak acceleration(11 msec. duration)       Certification     CE, FCC, CB, UL, CCC, BSMI       Fort Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating       PoE     n/a       Power consumption     35W       Max. Resolution     15.6° FHD       Max. Resolution     1920 x 1080       Max. Resolution     1920 x 1080       Max. Resolution     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Tope Angle     Projected Capacitive.       Light Tansmission     85%		Weight	2.4kg
Priving     Relative Humidity     10 - 95% @ 40 °C non-condensing       Vibration     0.5G       Shock     Shock 10G peak acceleration(11 msec. duration)       Certification     CE, FCC, B, UL, CCC, BSMI       Front Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating     20V/4.5A (90W)       Power consumption     35W       AxA Resolution     15.6° FND       Max Resolution     1920 x 1080       Max Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Frojected Capacitive.       Touch Screen Option     USB Interface	OS Support		
Environment Specification     Vibration     0.5G       Shock     Shock 10G peak acceleration(11 msec. duration)       Certification     CE, FCC, 0B, UL, CCC, BSMI       Front Panel Protection     IP 65 Compliant       DC Input Rating     20V/4.5A (90W)       Power consumption     35W       Answer Consumption     35W       Max. Resolution     1920 x 1080       Max. Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Ype       Touch Screen Option     View Interface		Operating temperature	0 ~ 40 °C (32 ~ 104 °F)
Environment Specification     Shock     Shock 10G peak acceleration(11 msec. duration)       Certification     CE, FCC, CB, UL, CCC, BSMI       Front Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating     20V/4.5A (90W)       Power consumption     35W       Ava consumption     35W       Max Resolution     1920 x 1080       Max Resolution     1920 x 1080       Max Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m <sup>2</sup> )     300       View Angle     170°/170°       Touch Screen Option     85%       Controller     USB Interface			
Shock     Shock Coc peak acceleration(11 msec. duration)       Certification     CE, FCC, CB, UL, CCC, BSMI       Front Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating     20V/4.5A (90W)       Power consumption     35W       AxA Resolution     15.6° FHD       Max.Resolution     1920 x 1080       Max.Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Ksp       Korta Iler     View Angle       View Instain     >85%	Environment Specification		
Front Panel Protection     IP 65 Compliant       Power Supply     DC Input Rating     20V/4.5A (90W)       PoE     n/a       Power consumption     35W       Size/Type     15.6" FHD       Max Resolution     1920 x 1080       Max Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     26%       Light Transmission     > 85%       Controller     USB Interface			
DC Input Rating     20V/4.5A (90W)       Poe     n/a       Power consumption     35W       size/Type     15.6" FHD       Max.Resolution     1920 x 1080       Max.Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Ype       Touch Screen Option     Vigh Transmission       Vise Interface     Vise Interface			
Power Supply     PoE     n/a       Power consumption     35W       Power consumption     35W       LCD Display     Size/Type     15.6° FHD       Max. Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Type       Touch Screen Option     Type       View Angle     View factor       View Screen Option     USB Interface			
Power consumption     35W       LCD Display     Size/Type     15.6" FHD       Max. Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Light Transmission     >85%       Controller     USB Interface			
Size/Type     15.6" FHD       Max.Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Light Transmission     > 85%       Controller     USB Interface	Power Supply		
Max Resolution     1920 x 1080       Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (ct/m <sup>2</sup> )     300       View Angle     170°/170°       Touch Screen Option     Light Transmission     > 85%       Controller     USB Interface			
LCD Display     Max. Color     262K       Pixel Pitch (um)     179(H) x 179(V)       Brightness (cd/m²)     300       View Angle     170°/170°       Touch Screen Option     Type       Light Transmission     > 85%       Controller     USB Interface			
LCD Display Pixel Pitch (um) 179(H) x 179(V)   Brightness (cd/m²) 300   View Angle 170°/170°   Touch Screen Option Type   Projected Capacitive. 1/0°/170°   Controller USB Interface			
Touch Screen Option Fixel Pitch (um) 179(H) X 179(V)   Brightness (cd/m²) 300   View Angle 170°/170°   Touch Screen Option Light Transmission   > 25% Controller   USB Interface	I CD Display		
View Angle     170°/170°       Touch Screen Option     Type     Projected Capacitive.       Light Transmission     >85%       Controller     USB Interface	LOD Display		
Touch Screen Option     Type     Projected Capacitive.       Light Transmission     > 85%       Controller     USB Interface			
Touch Screen Option     Light Transmission     > 85%       Controller     USB Interface			
Controller USB Interface			
	Touch Screen Option		
IPM IPM 2.0	TDM	Controller	
	IPM		IPM 2.0

### AD\ANTECH Interactive Self-service Terminals


All product specifications are subject to change without notice, \* identify as optional function

Last updated: 22-Mar-2023


# **Specifications (Cont.)**


	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	$\checkmark$
	Remote desktop	✓(VNC)
	Device-Specific Controls (Audio)	$\checkmark^{\star}$
	Connection Status	$\checkmark$
	Hardware Status	$\checkmark^{\star}$
DeviceOn/iService	Hard Disk Status	$\checkmark^{\star}$
Remote Device Management	Batch Operation Support	$\checkmark$
	OTA Storage Management	FTP
	OTA Software Updates	$\checkmark$
	Software Watchlist	$\checkmark$
	Software Start/Stop	$\checkmark^{\star}$
	Kiosk Mode	
*Dependent on device model	Peripherals Watchlist	$\checkmark^{\star}$

Note: DeviceOn//Service software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility

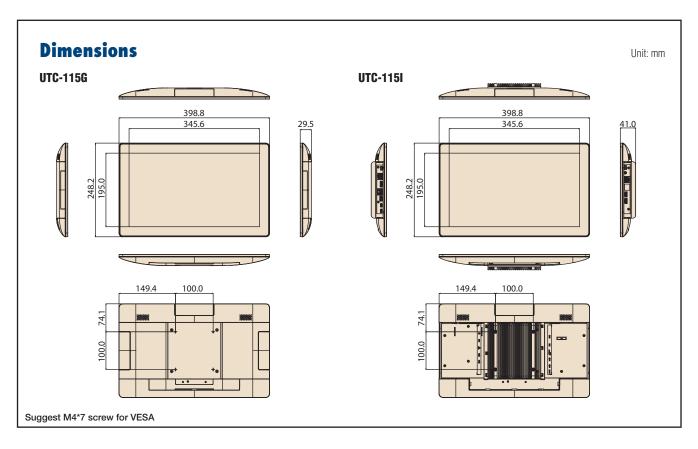

# Fully- Integrated I/O

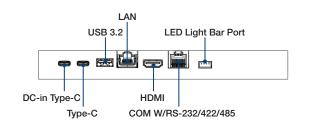

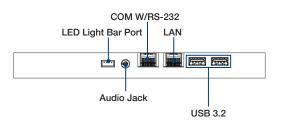

# **Ordering Information**

### For Worldwide Model

Part No.	Descriptions
UTC-115IP-WWW1F	15.6" Pcap, FHD 1920x1080, I5-1145G7E CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color
For US only Model	

### For US only Model

Part No.	Descriptions
UTC-115IP-WUS1F	15.6", Pcap, FHD 1920x1080, I5-1145G7E CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Power cord, Silver Color
UTC-115IP-NUS1F	15.6", Pcap, FHD 1920x1080, I5-1145G7E CPU, 8G RAM, 128G SSD, Wifi/BT, Power cord, Silver Color

### For China Only Model

Part No.	Descriptions
UTC-115IP-NCN1E	15.6" Pcap, HD 1366x768, i3-1115G4 CPU, 8G RAM, 128G SSD, No OS, Wifi/BT, Silver Color

### For EU only Model

Part No.	Descriptions
UTC-115IP-WEU1F	15.6" Pcap, FHD 1920x1080, I5-1145G7E CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color, Power Cord
UTC-115IP-WEF1F	15.6", Pcap, FHD 1920x1080, i3-1115G4 CPU, 8G RAM, 128G SSD, Win 10 IOT, Wifi/BT, Silver Color, Power Cord

### Extra ordering information

Part No.	Descriptions
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596-11	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1700025928-02	COM Port Converter cable RJ48-10P10C to D-SUB 9P 35cm
UTC-T01-STANDE	Tri Shape Floor Stand 120cm
UTC-100P-STAND0E	L Stand for UTC-115
UTC-300P-D20E	Desk Stand, Silver, for UTC-115/120
UTC-UPOS-STANDOE	Double Hinge Stand
UTC-AVALO-STANDOE	Avalo Stand
ARES-2423X-S151001	Table Stand for UTC-115 (Black)
ARES-2425X-S271001	Tilt Table Stand for UTC-100 Serires (Black) (Support Portrait & Landscape)
ARES-12250-L101000	Vesa Wall-mount for UTC-100 Series (Black)

#### Peripheral Mountable on All 4 Sides



### Peripherals for UTC-100(AIO system) series

Part No.	Description
UTC-100P-B11E	2D Barcode Scanner for UTC-115/120
UTC-100P-C10E	5M Camera for UTC-115/120
UTC-100P-R10E	RFID Scanner for UTC-115/120
UTC-100P-M10E	MSR Reader for UTC-115/120
UTC-100P-S10E	Smart Card Reader for UTC-115/120
UTC-100P-L10E	LED Light Bar for UTC-115/120
UTC-100P-F10E	Finger Print Reader for UTC-115/120
UTC-100P-T10E	Thermal Camera for UTC-115/120

# DeviceOn/iService

# Unified Remote Device Management Software

		Device	011/15	eivice		
	NATION INC. ON OUT Interest Inc. In		EXCENT DeviceOn/Service Ment Ment Ment Ment Ment Ment Ment Men	Q .	Weakh Shangai	
-	Parameters a	202		50		

# **Features**

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

# Introduction

33

ΆΡΙ

500

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

# **Total Management**

**Devices & Hardware** 

Windows, Linux, Android

Hardware, storage, battery

**Software & Peripherals** 

**Open for Expansion** 

Peripheral integration

Open APIs for integration

Software monitoring & access

Screens, USB devices, printers

# **Remote Access**

i (b)



- Real-Time MonitoringConnection/hardware status
- Software/peripheral status
- Failure notifications

# **Remote Controls**

- Power controls
- Audio, backlight controls
- Software controls

### Troubleshooting

- Screenshots
- Remote desktop support

# **Operational Efficiency**

### **OTA updates**

- System/software updates
- File repository management
- App store

### **Batch Controls**

<u>~</u>

ΟΤΑ

1-to-many batch reboot, etc.Time-saving tasks

### inne-saving tasks

# Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

# System Architecture

