

IDK-2110

10.4" SVGA 1,200 cd/m² Ultra High Brightness Industrial Display Kit with LED B/L



Features

- 10.4" LCD supports 800 x 600 pixels and wide operating temperature (-20 ~ 70° C)
- Ultra-high brightness of 1200 cd/m² with LED backlight
- High contrast ratio of 500:1
- High uniformity of 85%
- Superior sunlight readability
- LVDS signal interface
- Low power consumption 7.1 W
- 4W resistive touch solution (optional)
- Anti-Reflection surface treatment (optional)
- Manually VR brightness control (optional)
- Auto-dimming solution with light sensor (optional)
- Optical bonding (optional)

Introduction

The Advantech IDK-2110 series comes with a 10.4" 1200 cd/m² industrial grade LCD display, and an LED driver board. The series is also available with flexible options for 4-wire resistive touch screens and enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-2110 series supports 1200 cd/m² high brightness with low power consumption at the maximum consumption of 7.1W. Equipped with high level of brightness and wide operating temperature, IDK-2110 provides superior sunlight readability and is perfect for applications whether in semi-outdoor or outdoor environments.


Specifications

LCD Panel	Model	IDK-2110
	Display Size	10.4" LED backlight panel
	Resolution	800 x 600 (SVGA)
	Viewing Angle (U/D/L/R)	60°/70°/80°/80°
	Brightness	1200 (cd/m ²)
	Contrast Ratio	500 : 1
	Response Time (ms)	35 ms
	Colors	6bit (262K)/8bit (16.2M)
	Voltage	3.3 V
	Consumption	7.1 W
	Signal Interface	1 channel LVDS
	Weight	N series: 350 g R series: 470 g
	Backlight Life (hrs)	50,000hrs
	Dimensions (W x H x D)	N series: 236 x 176.9 x 5.7 mm R series: 236 x 176.9 x 8.5 mm
LED Driver Board	Efficiency	85%
	Output Current & Voltage	700 mA / 9 V (Typ.)
	Dimensions (W x H x D)	60 x 16 x 5 mm
Touch Screen (R series)	Touch Screen	4-wire Resistive
	Light Transmission	82.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-20 ~ 70° C
	Storage Temperature	-20 ~ 70° C
	Humidity	10 ~ 90% @ 39°C., non-condensing


Dimensions

Unit: mm

IDK-2110N Series

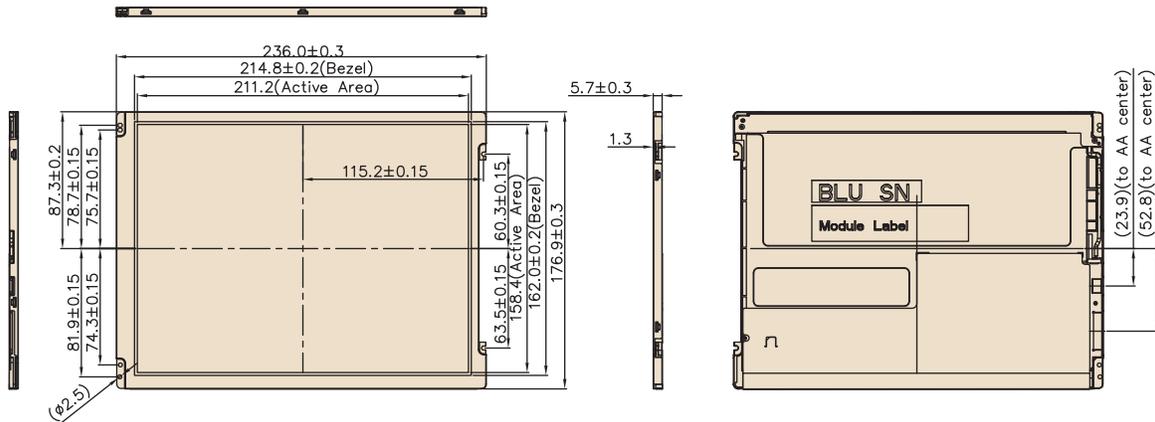

IDK-2110R Series

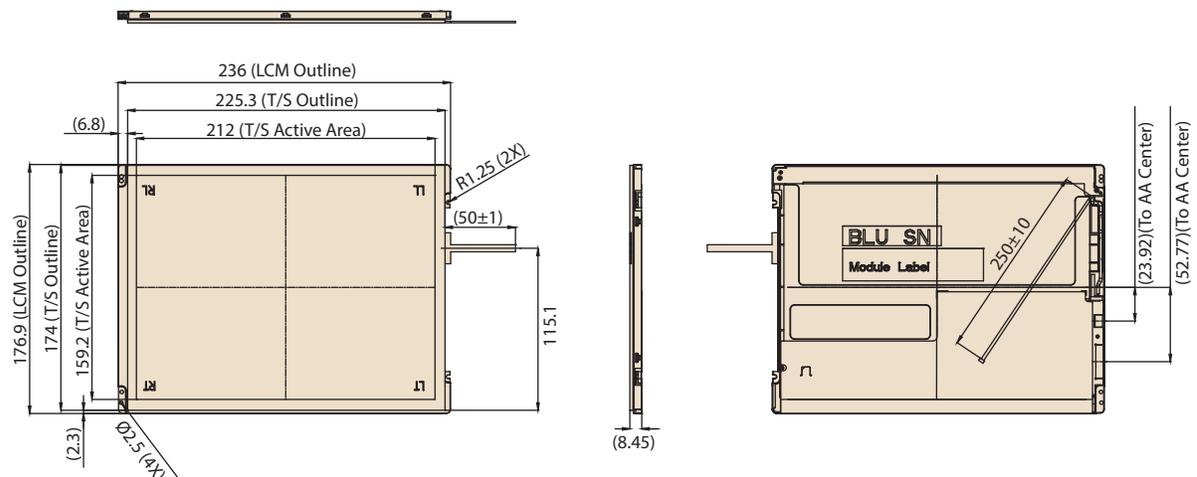

Ordering Information

Part No.	Size	Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-2110N-K2SVA2E	10.4"	1200	LVDS	N/A	N/A
IDK-2110R-K2SVA2E	10.4"	1200	LVDS	4-wire Resistive	USB

Packing List

Part Number	Description
ETM-RES05C-EEH4EE	1 x 4-wire Touch controller
1700020324-01	1 x USB cable
2066110000	1 x CD-ROM for User manual and touch driver

Note: Package contents are subject to change without prior notice

Optional Order

SBC Part No.	LVDS cable P/N	Display interface	B/L cable P/N	Touch interface	Touch power input
MIO-5270	96CB-L2040PAC4	Single channel 18bit LVDS (SVGA)	96CB-E0505PAC3	USB	5V
PCM-9362	96CB-L2020PAC2	Single channel 18bit LVDS (SVGA)	96CB-E0505PAC3	USB	5V
AIMB-270	96CB-L2040PAC4	Single channel 18bit LVDS (SVGA)	96CB-E0505PAC3	USB	5V

For more compatible embedded board solution, please visit our Build Your display web page as below
<http://www.advantech.com/buildyourdisplay>